




LED Tri-Proof



Product Features

- 1. High luminous efficacy 150lm/W;
- 2. 0-10V dimming;
- 3. PF>0.90, driver efficiency>92%;THD<20%;

Product Dimension





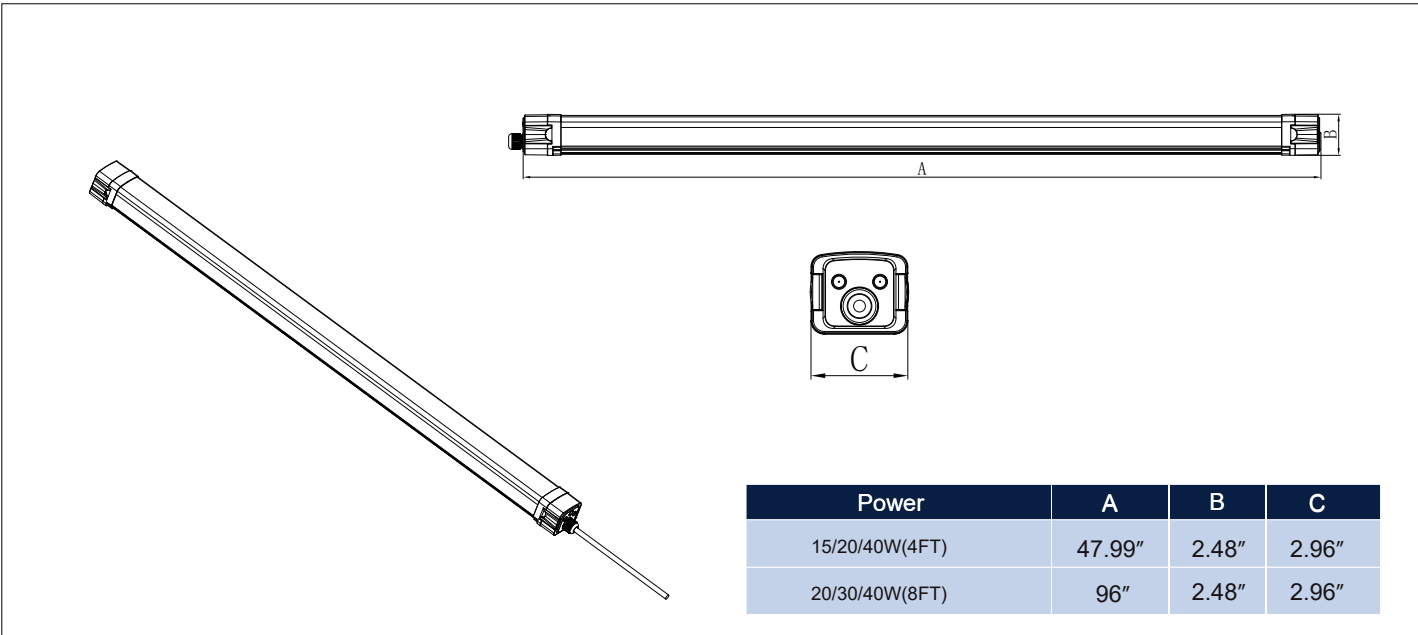





Specification

Part No.	Power	Input Current	Input Voltage	Frequency	PF	THD	Luminous Flux(Max)	CCT	Ra
SS-VAP-F-15W-H-50K	15W	0.138A	AC120-277V	50/60 Hz	>0.9	<20%	2250lm	3000K 4000K 5000K	>80
SS-VAP-F-20W-H-50K	20W	0.183A					3000lm		
SS-VAP-F-40W-H-50K	40W	0.367A					6000lm		
SS-VAP-E-20W-H-50K	20W	0.183A					3000lm		
SS-VAP-E-30W-H-50K	30W	0.275A					4500lm		
SS-VAP-E-40W-H-50K	40W	0.367A					6000lm		


Chain Installation

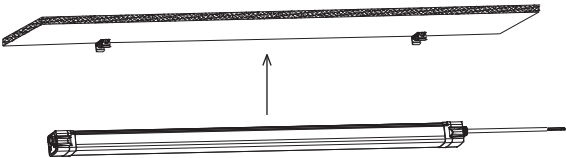1. Drill installation holes using electric tools.	2. Insert the expansion rubber plug from the accessory package into the installation hole.	3. Take out the buckle and self tapping screw from the accessory package, and use electric tools and screws to fix the buckle to the ceiling panel.
		
4. Push the lamp upwards and clip it onto the buckle.	5. Move the lamp left and right to adjust its position.	
		

6. Open the cover with the wire, adjust the power and color temperature to the appropriate position, and then install the cover.

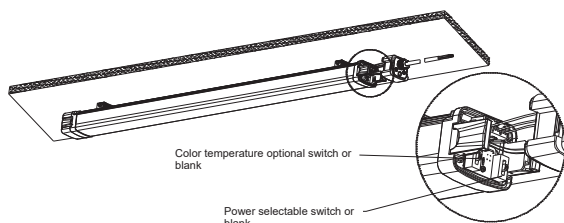


7. Connect the wires according to the diagram below, Installation completed.

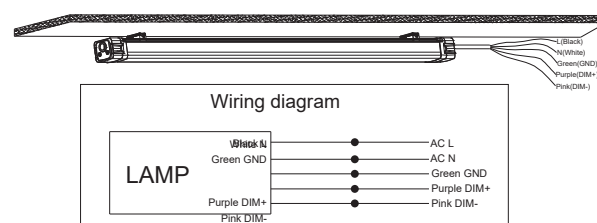


Installation of protective ne:

Installation steps for series connection of lighting fixtures


1. Repeat the installation steps 1 to 6 above, then remove the plug and open the cap.

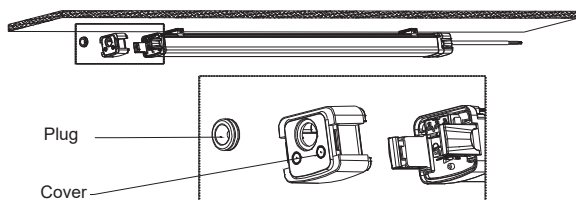

2. Take out the waterproof joint from the accessory package and install it on the cover.

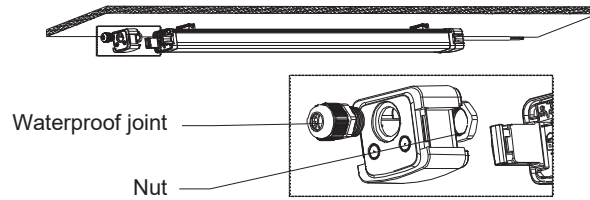


3. Thread the input wire of another lamp through the waterproof joint of the previous lamp, lock the waterproof joint, and connect the wire according to the diagram.

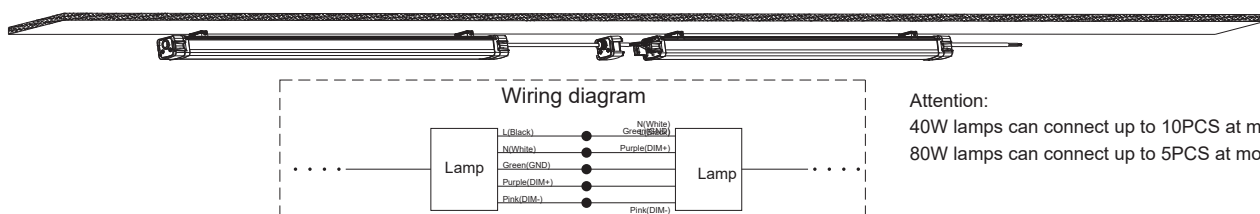


Attention:
40W lamps can connect up to 10PCS at most
80W lamps can connect up to 5PCS at most

4. As shown in the picture, fasten the cover of the previous light fixture.




5.Connect the wires according to the diagram below,Installation completed.

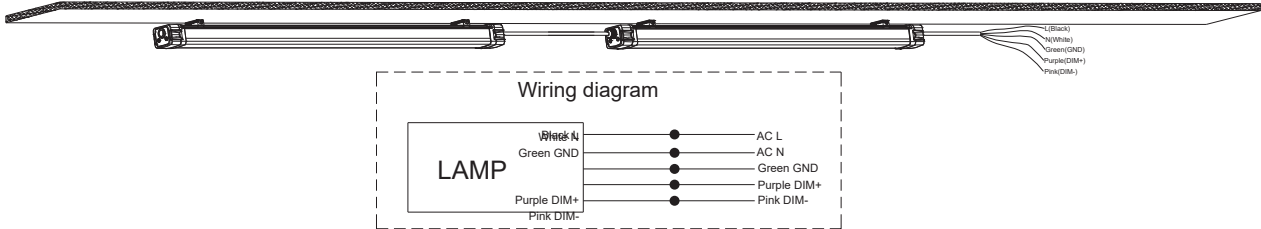

Packing/Weight

Power	Outer Carton Size (L×W×H)	Qty/Carton (pcs)	Net weight (lbs/kg)	Gross weight (lbs/kg)
15/20/40W(4FT)	(51.49''*9.29''*5.78'') (1308*236*147mm)	6	17.2/7.8	20.28/9.2
20/30/40W(8FT)	(96.33''*9.05''*5.78'') (2447*230*147mm)	6	26.39/11.97	32.12/14.57

Applications

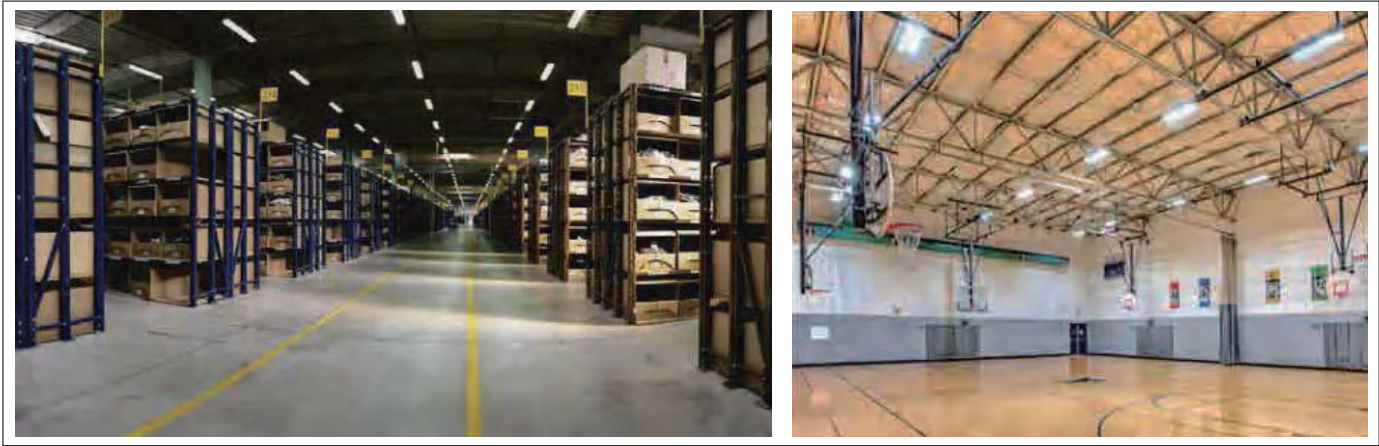

Note

- 1.The installation and maintenance must be completed by electricians or profession
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and cle
- 5.Working temperature: -22°F~122°F, storage temperature: -22°F~158°F.