


LED Strip / Low bay Light 3G Series

Version 3




Product Features

- 1.Expected Life— Projected life of at least 75,000 hours. Contact factory for TM-21 detail.
- 2.LEDs — Use of closely spaced, medium-power, high-brightness chips minimizes pixelation and provides uniform lens luminance. Available in Cool White (5000 K), Neutral White (4000 K), and Warm White (3500 K) color temperatures. CRI ≥ 80 (R9 > 0). LM-80 reports available.
- 3.Construction — Housing constructed of code-gauge, die-formed, cold-rolled steel. Wire way cover snaps in for easy removal. End plates riveted to housing. Equipped with knockout for nipple insertion.
- 4.Lens — Frosted, impact-resistant acrylic, hingeable from either side. Exterior surface of lens bottom embossed with prisms, sides embossed with internal prisms for low-brightness illumination.
- 5.Electrical — Universal voltage (120–277 VAC、347V) input, 50/60 Hz. Power factor > 0.9, THD < 20%.

- 6.Driver — High-performance driver features over-voltage, over-current, and short-circuit (with auto-recovery) protection. 0-10V Continuous (10-100%) dimming. Suitable for use with dimmers, sensors, daylight harvesting and other control strategies to achieve deeper energy savings.
- 7.Finish — All reflective surfaces are finished with a high-reflectance, lighting fixture white polyester powder.
- 8.Installation / Mounting — Light back housing includes holes and slots for various mounting methods. Wall/Surface Mount, Chain or Pendant Mount.
- 9.Certification — UL Listed. DLC Premium.

Product Dimension

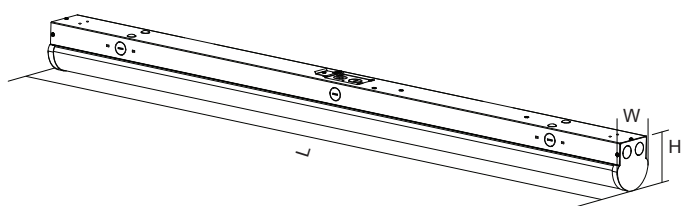

Model	L × W × H (inch)
EDI-LS-2FT20W	24" x 3.11" x 3.26"
EDI-LS-4FT24W / 32W / 40W	48" x 3.11" x 3.26"
EDI-LS-8FT40W / 50W / 64W / 80W	96" x 3.11" x 3.26"

Specification

Size	Part No.	Power	Input Voltage	Input Current	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
2FT	EDI-LS-2FT20W	20W	AC100-277V	0.22A	2600LM	130lm/W	3000K 4000K 5000K	>140°	>80 R9>0	>0.9	7 Years
4FT	EDI-LS-4FT24W	24W		0.26A	3120LM						
	EDI-LS-4FT32W	32W		0.35A	4160LM						
	EDI-LS-4FT40W	40W		0.44A	5200LM						
8FT	EDI-LS-8FT40W	40W		0.44A	5200LM						
	EDI-LS-8FT50W	50W		0.55A	6500LM						
	EDI-LS-8FT64W	64W		0.71A	8320LM						
	EDI-LS-8FT80W	80W		0.88A	10400LM						

Packing / weight

Size	Inner box (L×W×H)	Outer box (L×W×H)	Qty/Ctn (pcs)	N.W/pcs (lbs)	G.W/Ctn (lbs)
2ft	27.2" × 3.86" × 4.41" 690 × 98 × 112mm	27.95" × 12.8" × 10.4" 710 × 325 × 265mm	6	2.42	20.5
4ft	51.2" × 3.86" × 4.41" 1300 × 98 × 112mm	52" × 12.8" × 10.4" 1320 × 325 × 265mm	6	3.66	33.2
8ft	99.4" × 3.86" × 4.4" 2525 × 98 × 112mm	100.2" × 10" × 8.86" 2545 × 255 × 225mm	4	6.92	41.8