



### Product Features

**Ingress Protection:** IP65 Rating

**Installation:** Quick installation design, save installation cost.

**Construction:** One-piece polycarbonate housing&lens ,Built-in aluminum radiator, The standard color is White&diffuser.

**LED System:** LED system with a life rating of  $\geq 50,000$  hours at L70 @25°C. Luminaire efficacy up to 130 LPW.

**Electrical:** 120V-277 VAC universal voltage range. The power factor is  $\geq 90\%$  and THD is  $\leq 20\%$ .

**Dimming:** The driver is 0-10V Dimming Options.


**Color Characteristics:** CRI>80; CCT: 3000K/4000K/5000K

**Optics:** Type V distribution with a clear etched polycarbonate lens.

• **Certification:** ETL Listed. DLC Premium.

### Dimension

| Item  | L×W×H (inch)        |
|-------|---------------------|
| 8 ft. | 96" x 2.90" x 2.40" |

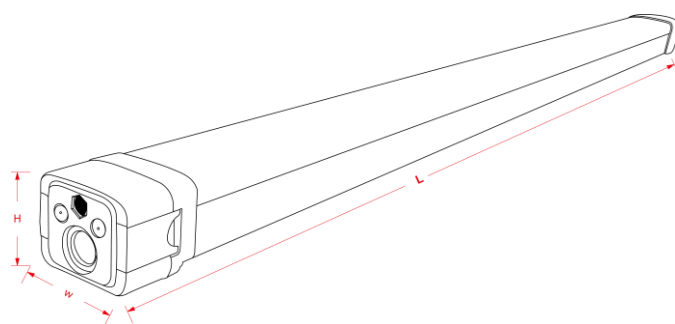

### Order Information

| Part No.        | Length | Max Power | Luminous Flux | Luminous Efficacy | Dimming | Input Voltage              | Certificate |
|-----------------|--------|-----------|---------------|-------------------|---------|----------------------------|-------------|
| EDI-VPG2-8FT26W | 8ft    | 26W       | 3900 lm       | 150 lm/W          | 0-10V   | 100-277V AC<br>100-347V AC | ETL / DLC   |

## Specifications

|                |                    | EDI-VPG2-8FT26W                  |
|----------------|--------------------|----------------------------------|
| Key Parameters | Ingress Protection | IP65 Rating                      |
|                | Dimensions         | 96" x 2.9" x 2.4"                |
|                | Voltage            | 100-277 ACV<br>100-347 ACV       |
|                | Wattage            | 26W                              |
|                | Efficacy           | 150 lm/W                         |
|                | Lumen              | MAX 3900 lm                      |
|                | Dimmable           | 0-10V                            |
| Certifications | DLC Premium        | Direct Linear Ambient Luminaires |
|                | Safety             | ETL /DLC                         |
| Photo metric   | CCT                | 5000k                            |
|                | SDCM               | ≤6                               |
|                | Beam Angle         | 120°                             |
|                | Ra                 | >80                              |
|                | R9                 | >0                               |
|                | Duv                | ≤ 0.006                          |
| Electrical     | Wattage            | 26W                              |
|                | Current            | Max 0.26A                        |
|                | Rated Voltage      | 100-277V AC / 100-347V AC        |
|                | Frequency          | 50/60Hz                          |
|                | THD                | ≤ 20%                            |
|                | Surge Protection   | 2KV                              |
|                | Power Factor       | ≥ 0.9                            |
| Lifetime       | L70                | ≥ 50000                          |
|                | L90                | ≥ 36000                          |
|                |                    |                                  |
| Operation      | Start Time         | ≤ 1S                             |
|                | Operating Temp     | -4°F - 104°F                     |
|                | Storage Temp       | -22°F - 140°F                    |
|                | Housing/Case       | PC                               |
|                | Optical-Lens       | PC Frosted /Clear                |
|                | Environment        | Indoor / Outdoor                 |
|                | Ingress Protection | IP65 Rating                      |