



Product Features

Ingress Protection: IP65 Rating

Installation: Quick installation design, save installation cost.

Construction: One-piece polycarbonate housing&lens ,Built-in aluminum radiator, The standard color is White&diffuser.

LED System: LED system with a life rating of $\geq 50,000$ hours at L70 @25°C. Luminaire efficacy up to 140 LPW.

Electrical: 120V-277Vac universal voltage range. The power factor is $\geq 90\%$ and THD is $\leq 20\%$.

Dimming: The driver is 0-10V dimmable (down to 6%).


Color Characteristics: CRI>80; CCT: 3000K/4000K/5000K

Optics: Type V distribution with a clear etched polycarbonate lens.

• Certification — UL Listed. DLC Premium.

Dimension

Item	L×W×H (inch)
2 ft.	24" x 2.90" x 2.40"
4 ft.	48" x 2.90" x 2.40"
8 ft.	96" x 2.90" x 2.40"

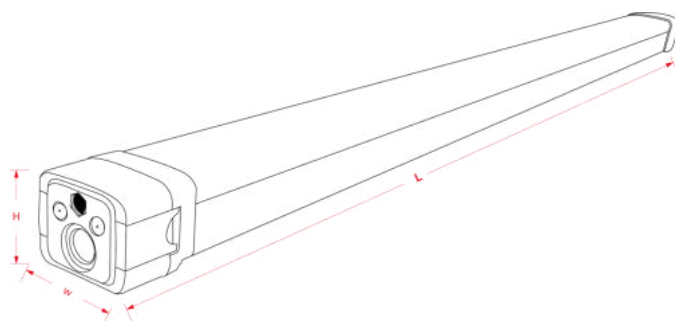

Order Information

Part No.	Length	Max Power	Luminous Flux	Luminous Efficacy	Dimming	Input Voltage	Certificate
EDI-VP-2FT20W	2ft	20W	2600 lm	135 lm/w	0-10V	100-277 ACV	ETL / DLC
EDI-VP-4FT24W	4ft	24W	3231 lm	135 lm/W	0-10V	100-277 ACV	ETL / DLC
EDI-VP-4FT32W		32W	4530 lm				
EDI-VP-4FT40W		40W	5702 lm				
EDI-VP-8FT40W	8ft	40W	5702 lm	135 lm/W	0-10V	100-277 ACV	ETL / DLC
EDI-VP-8FT60W		60W	8626 lm				
EDI-VP-8FT82W		82W	10660 lm				

Specifications

		EDI-VP-2FT20W	EDI-VP-4FT32W	EDI-VP-4FT42W	EDI-VP-4FT52W	EDI-VP-8FT40W	EDI-VP-8FT60W	EDI-VP-8FT82W
Key Parameters	Ingress Protection	IP65 Rating	IP65 Rating			IP65 Rating		
	Dimensions	24" x 2.9" x 2.4"	48" x 2.9" x 2.4"			96" x 2.9" x 2.4"		
	Voltage	100-277 ACV	100-277 ACV			100-277 ACV		
	Wattage	20W	24W	32W	40W	40W	60W	82W
	Efficacy	135 lm/W	135 lm/W			135 lm/W		
	Lumen	2600 lm	3231 lm	4530 lm	5702 lm	5702 lm	8626 lm	10660 lm
Certifications	DLC Premium	Direct Linear	Direct Linear Ambient Luminaires			Direct Linear Ambient Luminaires		
	Safety	ETL						
Photo metric	CCT	3500K-6500K						
	SDCM	≤6						
	Beam Angle	120°						
	Ra	>80						
	R9	>0						
	Duv	≤ 0.006						
Electrical	Wattage	20W	32W	42W	40W	60W	82W	102W
	Current	Max 0.2A	Max 0.32A	Max 0.42A	Max 0.52A	Max 0.64A	Max 0.82A	Max 1.02A
	Rated Voltage	100-277 ACV						
	Frequency	50/60Hz						
	THD	≤ 20%						
	Surge Protection	2KV						
	Power Factor	≥ 0.9						
Lifetime	L70	≥ 50000						
	L90	≥ 36000						
Operation	Start Time	≤ 1S						
	Operating Temp	-4°F+113°F						
	Storage Temp	-22°F+149°F						
	Housing/Case	PC						
	Optical-Lens	PC Frosted /Clear						
	Environment	Indoor / Outdoor						
	Ingress Protection	IP65 Rating						