





LED Parking Lot Light Street Light



● TYPE 5

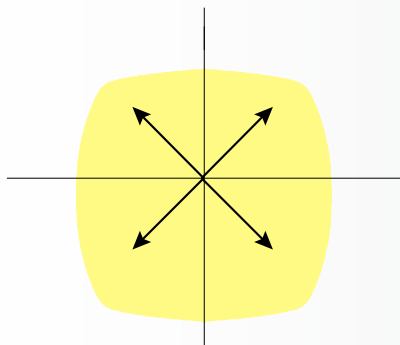

Dimension

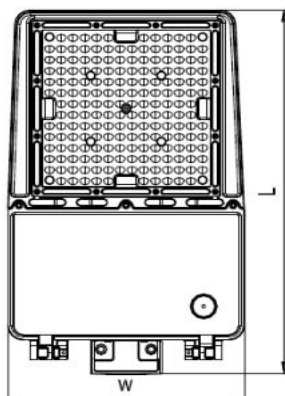

Power	W mm(inch)	L mm(inch)	H mm(inch)
75W	265(10.4')	437(17.2'')	58(2.3'')
100W	265(10.4')	437(17.2'')	58(2.3'')
150W	265(10.4')	437(17.2'')	58(2.3'')
200W	285(11.2')	483(18.2'')	58(2.3'')
240W	352(15.1')	532(20.9'')	63(2.5'')
300W	352(15.1')	532(20.9'')	63(2.5'')

Parameter

Model No.	PKC-75WP	PKC-100WP	PKC-150WP	PKC-200WP	PKC-240WP	PKC-300WP
Wattage	75W	100W	150W	200W	240W	300W
Luminous Efficacy	130-150 lm/w					
Lumens output	9750-11250lm	13000-15000lm	19500-22500lm	26000-30000lm	31200-36000lm	39000-45000lm
MF Equivalent	250W	300-400W	500W	600W	800W	1000W
Fixture Weight	4.2kg (9.2lb)	4.3kg (9.5lb)	4.4kg (9.7lb)	5.2kg (11.5lb)	6.8kg (15.0lb)	7.1kg (15.6lb)
LEDs Brand	(Philips) Lumileds SMD3030					
CCT	3000K, 4000K, 5000K, 5700K					
CRI	70+ or 80+					
Beam Angle	TYPE3, TYPE4, TYPE 5					
Input Voltage	100-277Vac or 277-480Vac					
Surge Protection	6KA / 10KA					
Function	1-10V dimming, Photocell, Motion Sensor Optional					
Power Factor	>0.95					
IP Rating	IP65 /Wet Location					
Working Temp.	-40° C ~ 50° C (-40° F~122° F)					
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)					
Finish	Brown					
Lifespan(>70)	>100,000 Hours					
Certification	ETL, cETL, DLC Premium, CE, RoHs					