

LED UFO High Bay



A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.




Product Features


1. DLC 5.1 Premium with high luminous efficiency and low UGR;
2. Simple and stylish appearance;
3. Excellent heating dissipation;
4. Branded driver and LED's;
5. Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth ;
6. Very complete accessories for option.
7. 0-10 diming.
8. Matches 3PIN/headphone jack/ZHAGA three sensors

Product Dimension

1. Rings type:

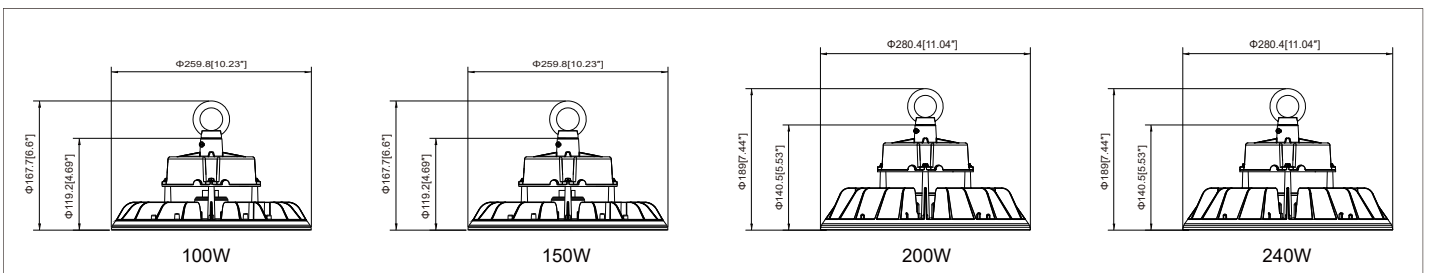

2. Hook type:

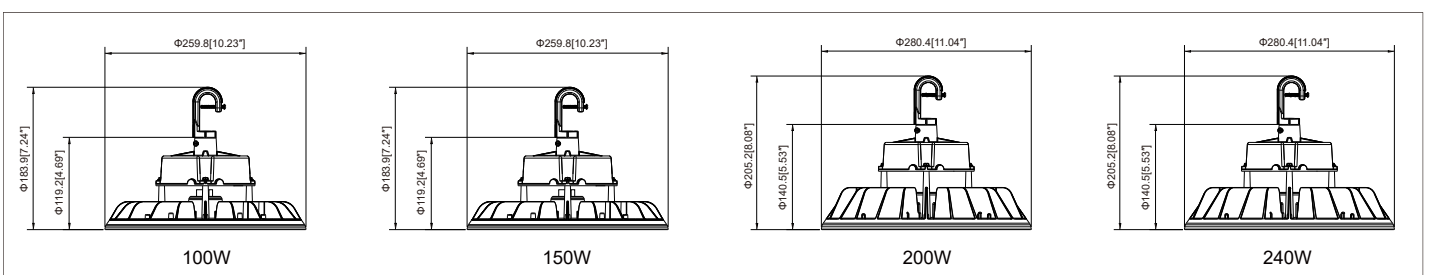



Product Parameters

Single power & CCT and CCT selectable																							
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp she											
SS-UFO09-100W-x-xx-Y	100W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	90°	150lm/W	Ra>70	-40°F~-113°F -40°C~45°C	-40°F~-158°F -40°C~70°C	Wet Location	≥50000H	Black & White											
SS-UFO09-150W-x-xx-Y	150W																						
SS-UFO09-200W-x-xx-Y	200W																						
SS-UFO09-240W-x-xx-Y	240W																						
SS-UFO09-100W-x-MV-xx-Y	100W	AC 120-347V																					
SS-UFO09-150W-x-MV-xx-Y	150W																						
SS-UFO09-200W-x-MV-xx-Y	200W																						
SS-UFO09-240W-x-MV-xx-Y	240W																						

x can be any digits or letters represents different light effects.

xx can be TC or xxK, TC = only adjust color temperature, xxK=No adjust wattage and color temperature(xx can be any digits or letters).

Y can be A, B, C, D or blank representing sensor type, A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.

Tunable power and single CCT																
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Ef ciency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp she				
SS-UFO09-150W-x-TP-Y	150/120/100W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	90°	150lm/W	Ra>70	-40°F~-113°F	-40°F~-158°F	Wet Location	50000H	Black & White				
SS-UFO09-240W-x-TP-Y	240/200/150W							-40°C~45°C	-40°C~70°C							
SS-UFO09-150W-x-MV-TP-Y	150/120/100W	AC 120-347V														
SS-UFO09-240W-x-MV-TP-Y	240/200/150W															

x can be any digits or letters represents different light effects.

TP = only adjust wattage

Y can be A, B, C, D or blank representing sensor type, A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.


Power & CCTselectable												
Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp she
SS-UFO09-240W-x-TCP-Y	240/200/150W	AC 120-277V	3500K 4000K 5000K	2835 LUMILEDS	90°	150lm/W	Ra>70	-40°F~-113°F -40°C~45°C	-40°F~-158°F -40°C~70°C	Wet Location	≥50000H	Black & White
SS-UFO09-150W-x-TCP-Y	150/120/100W											
SS-UFO09-240/W-x-MV-TCP-Y	240/200/150W	AC 120-347V										
SS-UFO09-150W-x-MV-TCP-Y	150/120/100W											

x can be any digits or letters represents different light effects.

TCP = adjust color temperature and wattage

Y can be A, B, C, D or blank representing sensor type, A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.

Product Application

Accessories mounting brackets		
Wire Guard 	Aluminum Reflector 	PC reflector 
Microwave Motion Sensor 	Pandent mounting 	Celing with loop 