



CGT

LED Canopy 40W

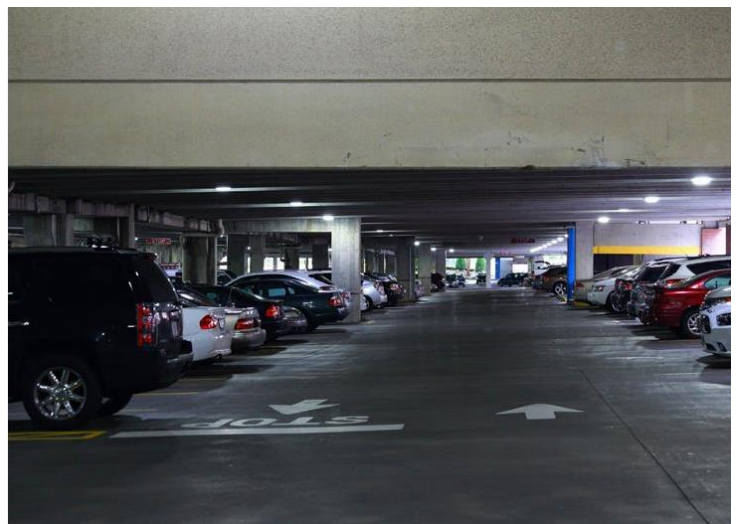

- ETL, cETL DLC premium Listed
- High Lumens Up to 120-130lm/w
- IP65 Wet Location
- Built-in Sensor optional
- High Quality driver

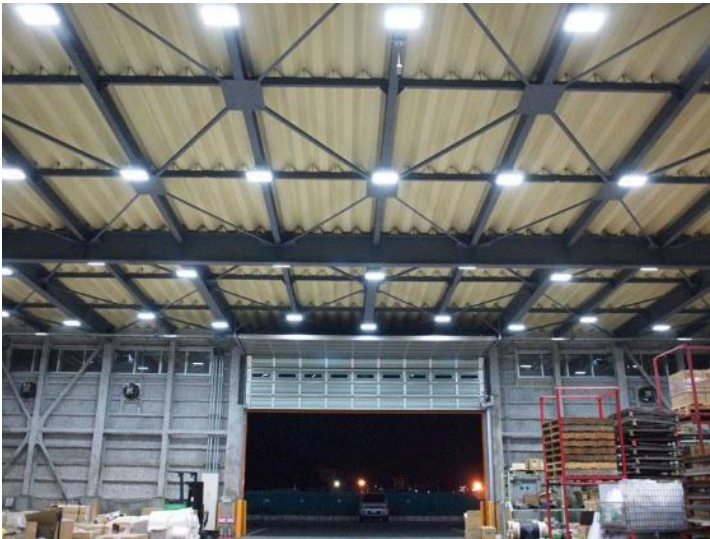

ETL for USA
cETL for
CANADA



Visit
designlights.org
to see which
models
are DLC listed

Repair or
replace product
Freely
in warranty



High Lumens

High light transmittance
cover. high efficient SMD
LED Chips



Shatterproof polycarbonate Lens

The high lumen output low
profile design make the led
canopy light ideal for building
exteriors and parking
garages.



Installation Multiple Ways

Match J-BOX installation or
Pole pendant installation



High Heat Dissipation Design

Die-casting aluminum heat
sink
For superior thermal
performance and increased
longevity



Super Bright

Luminous efficacy up to
120-130lm/w



Other function optional


1-10V dimmable optional
Motion Sensor optional
Photocell optional

Parameter

Model No.	WP-40D2-50K
Wattage	40W
Luminous Efficacy	125-130lm/w
Lumens output	5200-5300lm
HID/MF Equivalent	200W
Fixture Weight	2kg(4.4 lbs)
LEDs Brand	Lumileds (Philips) SMD3030
CCT	3000K, 4000K, 5000K, 5700K
CRI	70+
Beam Angle	120°
Input Voltage	100-277 50-60Hz
Dimming	Dimmable
Power Factor	>0.90
IP Rating	IP65 /Wet Location
Working Temp.	-40° C ~ 50° C (-40° F~122° F)
Storage Temp.	-40° C ~ 70° C (-40° F~158° F)
Finish	Brown
Housing	Die-casting Aluminum
Diffuser	PC Lens
Installation	Surface Mounting, Pole Pendant
Lifespan(>70)	>100,000 Hours
Certification	ETL, cETL, DLC premium,

Dimension

Unit: mm

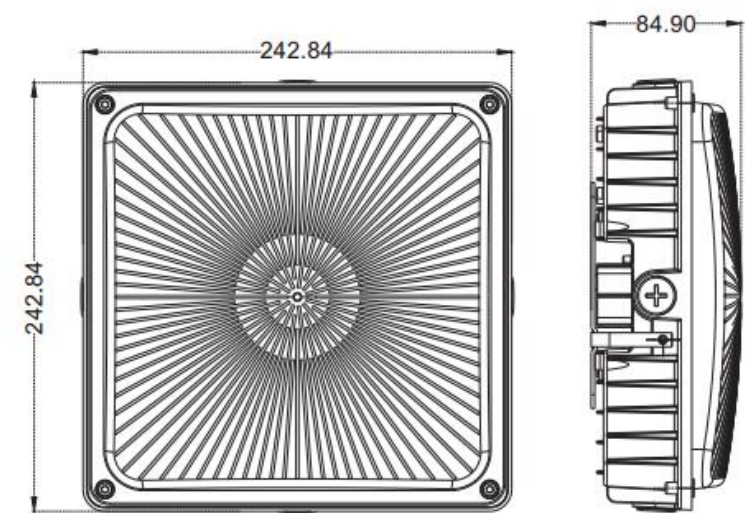

Order Information

Sample: WP-40D2-50K(5000K)

	(XXXX)	(X)
Product Family	CCT	Function
WP-40D2-50K = 40W	3000K = 3000K 4000K = 5000K 5000K = 5000K 5700K = 5700K	Blank = Non-Dim D = 1-10V dimmable S = ON/OFF Sensor BS = Bi-level Sensor
In Standard	Options (add as Suffix)	Accessories (order Separately)
Brown Finish CRI>70 Input Voltage: 120-277Vac 50/60Hz	WH = White Finish (MOQ>1000pcs) BL= Black Finish (MOQ>1000pcs) Other customized	BK = Easy Mounting Bracket

Package Information

ITEM	QTY/CTN	G. W.	CTN SIZE
WP-40D2-50K	5pcs	9.3kg(20.5lb)	52x28x29cm (0.042cbm)