



WL90/112

Full Cut-Off LED Wall Pack

25W / 50W / 80W / 100W / 120W / 150W



Specifications

Wattage	25W / 50W / 80W / 100W / 120W / 150W
Power Factor	≥0.95
LED Chip	SMD 3030, Philips or other LED chip
Driver Brand	Meanwell / SOSEN/ Other Brand
CCT	3000K / 4000K / 5000K / 6000K / 3CCT Switch
AC Input Voltage	100-277V / 120-347V / 180-480V
Exclusive Feature	CCT & Power selectable
Material	Aluminum alloy + PC optic lens
Housing color	Dark Bronze / Black / Gray / White
Ambient Temperature	-40°C ~ 45°C (-40°F ~ 113°F)
Total Harmonic Distortion	<20%
Lifetime	50,000H
IP Rating	IP65

Features




CCT Select



Power Select



Motion sensor




Daylight sensor



ADC12 Die casting

Full Cut Off—Dark Sky (No Up Light)

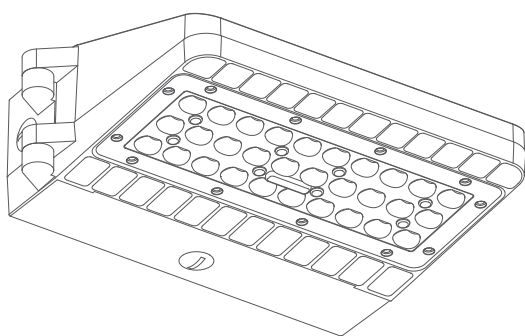

Sensor (Daylight sensor / Motion Sensor available)



Daylight Sensor /or
Built-in light sensor





Motion Sensor



Remote Controller

Fine heat sink design, fine heat dissipation

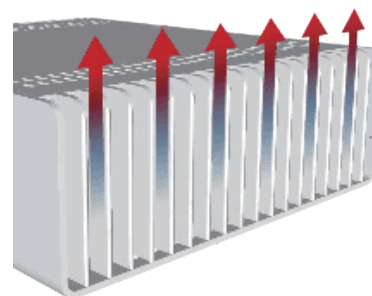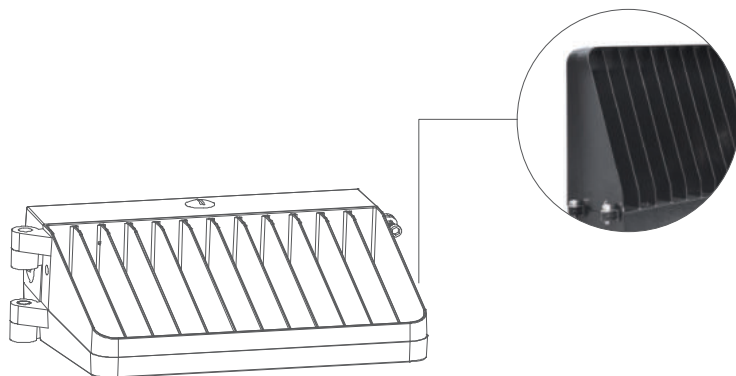

Applications



Facility Plant



Back Yard



Emergency Exit




Parking Lot Area




Residential Area

Light Distribution

Type III

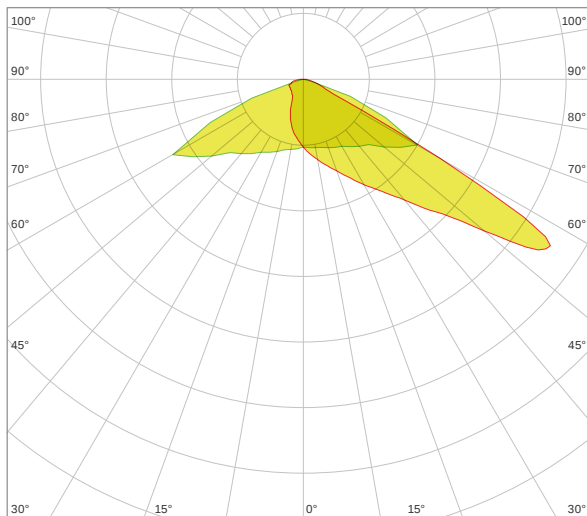


Type IV

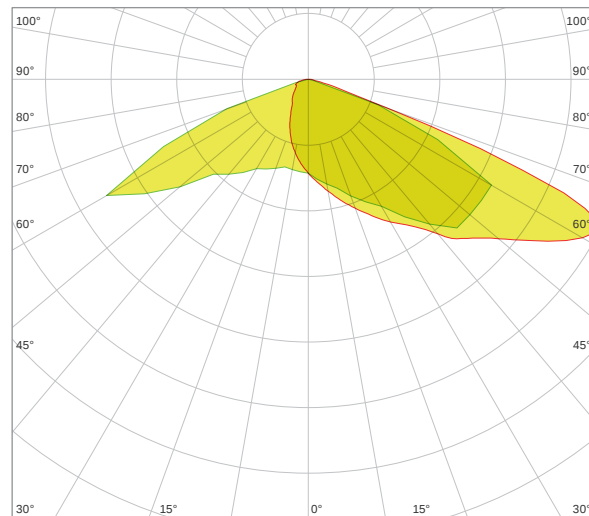


Installation


1. Use Allen driver to loosen the 2 pcs screws. (Sometimes the screws fixed too tight, then use your hand to press the fixture, that will be easier to loosen the screws)

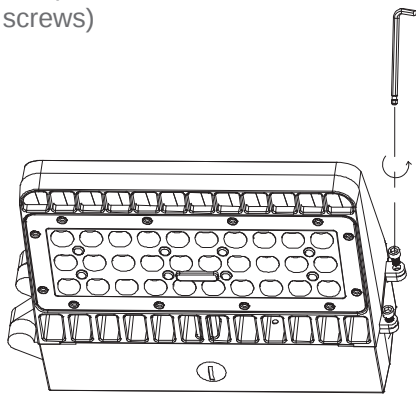


2. Open the fixtures and take out the heat sinker (fixture main part) from the back housing.

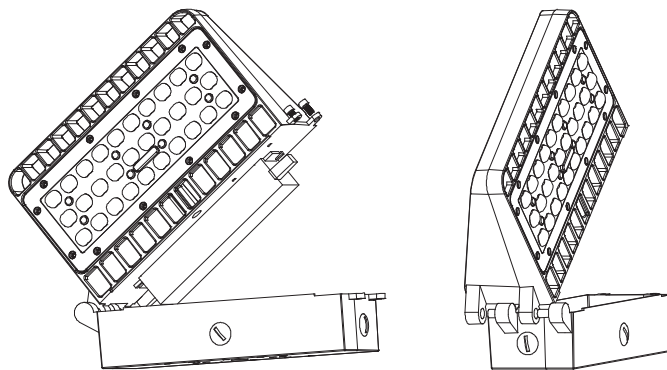


3. Use screws to install and fix the back housing on the wall. Keep the back housing fixed tight on the wall.



4. Thrust the heat sinker (fixture main part) holes into the back housing (picture shown on the left), and then make wire connections to main supply. Consult an electrician and install according to national, local, and state codes.

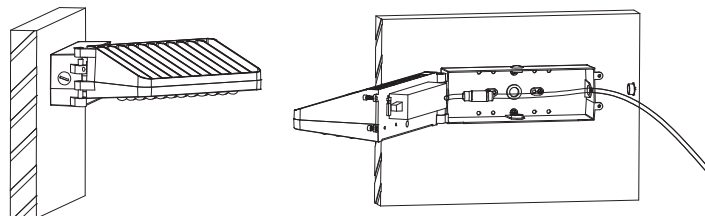


5. Close the fixture after wiring to the main supply. Fix the screws to finish the installation.

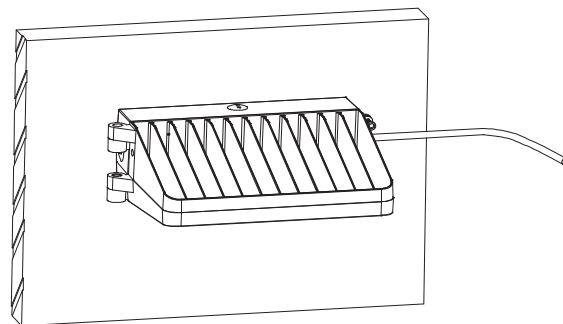


Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension	N.W (Kg/lb)	G.W (Kg/lb)	QTY / CTN
25W	295 × 90 × 216mm 11.61 × 3.54 × 8.5 in	370 × 190 × 310 mm 14.57 × 7.48 × 12.20 in	2.1Kg (4.63lb)	2.8Kg (6.17lb)	1 PCS
50W	295 × 90 × 216 mm 11.6 × 3.54 × 8.5 in	370 × 190 × 310 mm 14.57 × 7.48 × 12.20 in	2.1Kg (4.63lb)	2.8Kg (6.17lb)	1 PCS
80W	295 × 90 × 216mm 11.6 × 3.54 × 8.5 in	370 × 190 × 310 mm 14.57 × 7.48 × 12.20 in	2.4Kg (5.29lb)	3.1Kg (6.83lb)	1 PCS
100W	295 × 90 × 216mm 11.6 × 3.54 × 8.5 in	370 × 190 × 310 mm 14.57 × 7.48 × 12.20 in	2.4Kg (5.29lb)	3.1Kg (6.83lb)	1 PCS
120W	362 × 112 × 256 mm 14.25 × 4.41 × 10.08 in	430 × 200 × 350 mm 16.93 × 7.87 × 13.78 in	4.8Kg (10.58lb)	5.7Kg (12.57lb)	1 PCS
150W	362 × 112 × 256 mm 14.25 × 4.41 × 10.08 in	430 × 200 × 350 mm 16.93 × 7.87 × 13.78 in	4.8Kg (10.58lb)	5.7Kg (12.57lb)	1 PCS

Protection

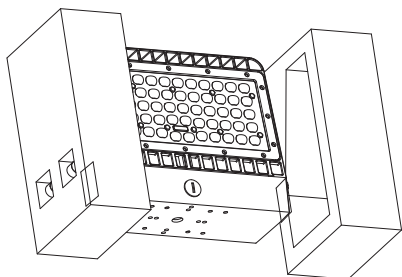

Package



1 PCS



Shenzhen Yaorong Technology Co., Ltd

Add: Floor 7, Building 5B, huaqiang idea park, Guang Ming District,
Shen Zhen 518107 China
Phone: +86 - 0755 - 8949 1155 Fax: +86 - 0755 - 8949 1102
Web: <http://szyaorong.com>