



Project:	
Type:	
Catalog #:	



The Wattage Tunable and Color Selectable LED Canopy Light is an outdoor lighting solution often used for gas stations, underpasses, loading docks, or any other outdoor ceilings or canopies. This LED canopy light replaces traditional metal halide fixtures up to 400W while saving up to 70% in energy savings and save on the maintenance of replacing light bulbs over the life of this LED fixture. The LED canopy light can be installed flush to ceiling or by pendant mount (sold separately).

Product Features

- **Color Temperature:** 3500K, 4000K, 5000K Selectable
- **Power Use:** 100W/130W/150W Selectable
- **Housing Construction:** Die-cast aluminum housing
- **Optical Lens:** polycarbonate (PC) lens
- **Beam Angle:** 120°
- **LEDs:** Bridgelux 2835
- **LED Life Hours:** Rated to last 50,000 hours
- **Driver:** AC120-277V, 50/60Hz, 0-10V Dimming
- **Power Factor (PF):** > 0.90
- **Total Harmonic Distortion (THD):** <20%
- **Color Rendering Index (CRI):** > 80
- **Operating Temperature:** -40°F ~ 113°F (-40°C ~ 45°C)
- **Sensors:** Photocell built in


Safety & Performance Listings

- ETL Listed
- IP65 rated.
- DLC Premium V5.1
- Complies with FCC Part 15, class B.

Applications

Outdoor Canopy Locations such as Gas Stations | Drive Throughs | Covered Docks | Parking Garages and Shelters | Pavilions | Building Entrances

Dimensions

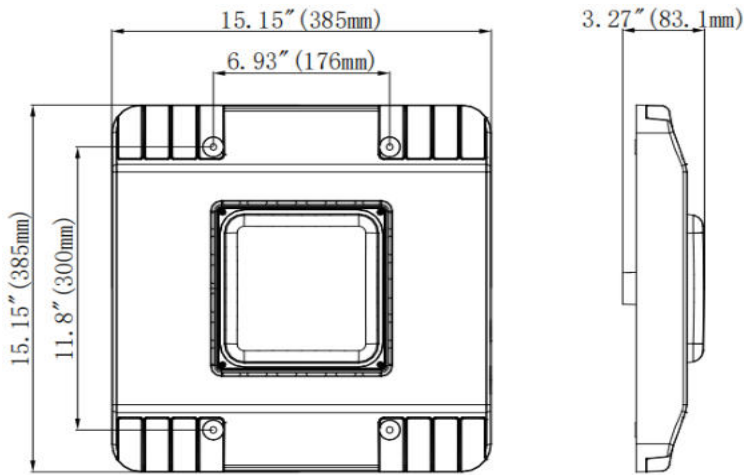

Electrical Specifications

Model	Watts	Lumens	LPW	CCT	CRI	Voltage	Beam Angle
LG-PGC-SSQ-100/130/150W-3CCT	100	13,000	130	3500K	>80	120-277	120°
	130	16,900		4000K			
	150	19,500		5000K			

DLC Premium | Brand: LumeGen | DLC QPL : S-V9ZSDM


Wattage & Color Tunable Instructions



Remove white plastic cover for access to wattage and color adjustable switches to select the preferred wattage (brightness) and color temperature.


Remove clear plastic cover for access to photosensor to enable or disable the light sensor.

Photometrics

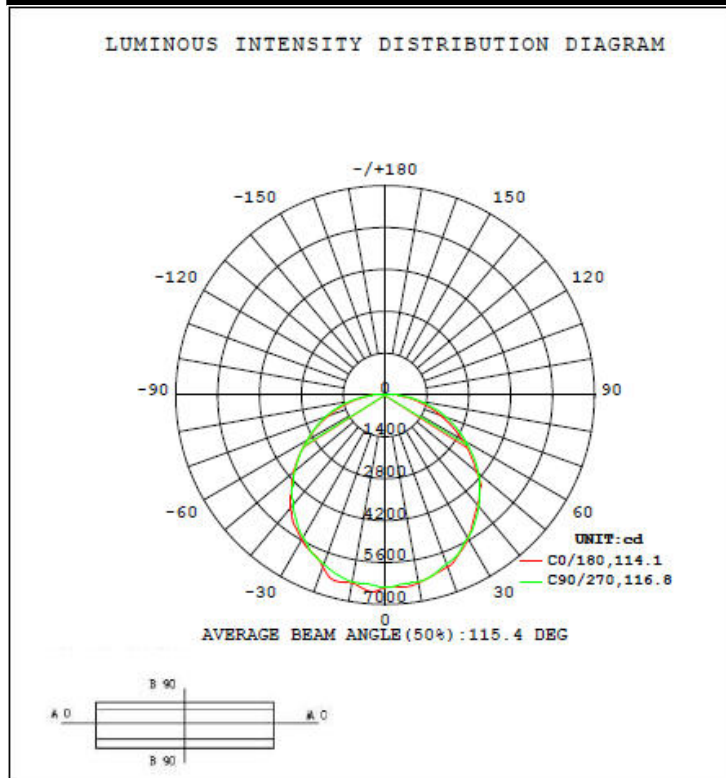

Mounting

Flush Mount Plate (default)

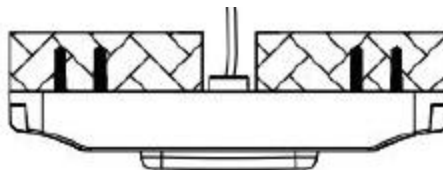

Pendant Mount with 3/4" conduit (sold separately)

Packing

Wattage	Outer Carton Size (L*W*H)	Qty/Ctn (pcs)	Net Weight (lbs)	Gross Weight (lbs)
100/130/150W	17.13"x17.13"x4.61"	1	9.3	10.5